



Description

The GMAD access door enables maintenance and cleaning of square ducts. The access door is made from galvanized steel sheet. The frame in contact with the duct wall has a rubber mat seal. The access door features a 25 mm thick thermal insulation layer made from glass wool. Four clasp locks allow easy opening and closing of the access door.

If properly installed and closed, the access door provides air insulation class C.

Available materials — Product code examples


IPFD-... galvanized steel sheet

Product code example

Product code: IPFD - aaa

type _____
 AxB _____

Dimensions

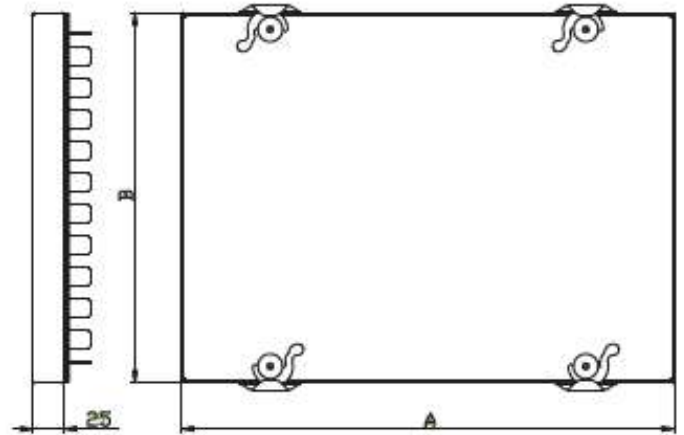

Product code	A (mm)	B (mm)	Number of clasp locks
IPFD-100-100	100	100	2
IPFD-150-100	150	100	2
IPFD-150-150	150	150	2
IPFD-200-100	200	100	2
IPFD-200-125	200	125	2
IPFD-200-200	200	200	2
IPFD-250-250	250	250	4
IPFD-300-150	300	150	4
IPFD-300-200	300	200	4
IPFD-300-300	300	300	4
IPFD-350-350	350	350	4
IPFD-400-200	400	200	4
IPFD-400-300	400	300	4
IPFD-400-400	400	400	4
IPFD-450-300	450	300	4
IPFD-450-450	450	450	8
IPFD-500-500	500	500	8
IPFD-600-300	600	300	8
IPFD-600-400	600	400	8
IPFD-600-450	600	450	8
IPFD-600-600	600	600	8