

Reflectafoil Tape

DESCRIPTION

Reflectafoil Tape is an Aluminium Foil tape coated with a flame retardant cold weather water based acrylic adhesive on one side, and lined with a release paper to protect the adhesive face. This product has undergone testing to BS EN 13051-1 standards and achieves Class B.

SPECIFICATION

Roll size	100mm x 45m*
Thickness (inc. release liner)	70µm (0.07mm)
Tensile Strength	45N / 25mm
Elongation	3%
Adhesion to Steel	12N/25mm
Rolling Ball Tack Test	5cm

* Other sizes available on request.

Application Temperature

+10°C to +40°C the surface must be free from ice or moisture.

Service Temperature

-30°C to +120°C.

Storage


Normal room temperature.

Uses

A highly specified Aluminium Foil Tape where long life or great adhesive strength is required.

Application

Surfaces to be bonded must be clean, dry and free from dust. For sealing overlaps of Reflectatherm Plus, Profoil 86 I, Procheck 300 & Procheck 500, Procheck Adapt and Reflectatherm Premier.

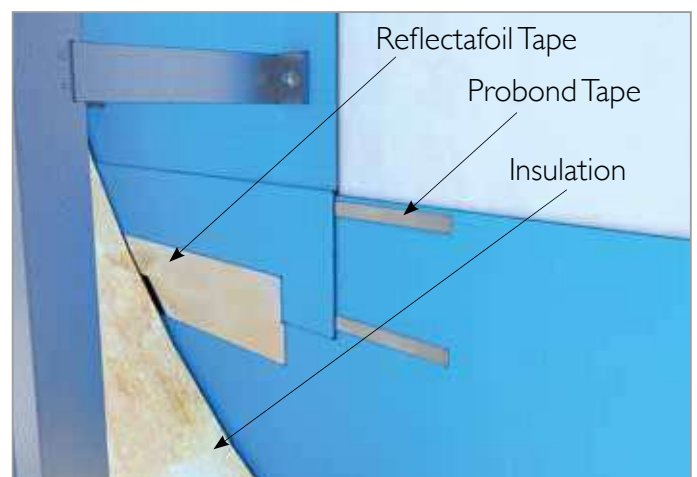

Visit our website...

www.proctorgroup.com

contact@proctorgroup.com | +44 (0) 1250 872261

Revised January 2025 | Version 1.002 | New review due January 2026

