


Wraptite®-FZ

AIRTIGHTNESS

WHY CHOOSE WRAPTITE-FZ?

Wraptite-FZ is a vapour permeable airtight membrane for use at floor junctions. It is simple to install, flexible and lightweight, and offers temporary protection against wind driven rain, snow and dust.

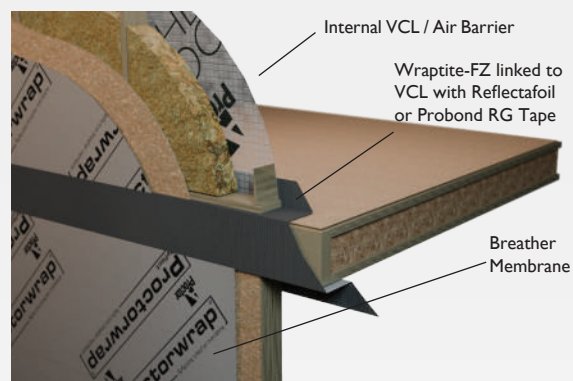

Cassette Floor Junction

PRODUCT CHARACTERISTICS

PROPERTY	TEST/STANDARD		RESULT	
	BS EN 13859-2:2010			
Roll size			1 m x 50 m 750 mm x 50 m	
Mass per unit area	EN 1849-2		130 g/m ²	
Reaction to fire	EN 11925-2		Class E	
Water vapour resistance Sd	EN ISO 12572		0.020 m	
Water penetration	EN 1928	Before ageing: After ageing:	Class W I Class W I	
Tensile strength	EN 12311-1	Before ageing: After ageing:	MD 300 N MD 235 N	CD 200 N CD 145 N
Elongation	EN 12311-1	Before ageing: After ageing:	MD 60% MD 40%	CD 100% CD 80%
Tear resistance	EN 12310-1		MD 120 N	CD 140 N
Flexibility at low temperature	EN 1109		≥40°C	



Download a full Wraptite brochure from our website...

www.proctorgroup.com

CE

Proctor
Group

contact@proctorgroup.com | +44 (0) 1250 872261