



ResoDeck 23PRO

Product Information & Technical Data Sheet

Resonate's **ResoDeck 23PRO** is a high performance acoustic flooring solution suitable for use on separating floors to help compliance with Part E of the building regulations. The composite acoustic overlay panel is laid on the timber or concrete sub-deck, before the final floor coverings are installed.

At only 23mm thick the **ResoDeck** panels have minimal impact on floor height. The 18mm P5 chipboard top layer is technically bonded to 5mm **ResoFleece** a high performance recycled polyester fibre resilient layer.

The **ResoFleece** resilient layer provides superior impact sound reduction over other types of resilient layers. **ResoDeck 23PRO** is perfectly suited for refurbishment applications.


Key Benefits



**Excellent
impact sound
reduction**



**Easy to install
tongue and groove
edge**




**Low profile
solution, low
impact on floor
height**



System Details

1. Resonate **ResoDeck** floor panel
2. **ResoEdge** flanking strip

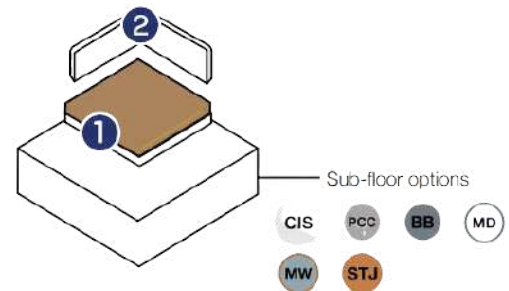

Dimensions

Panel Dimensions

600 mm (W)
2400 mm (L)
23 mm (H)

Panel Weight

12.7 kg/m²
18.3 kg Per Panel

Panels Per Pallet

70 Panels (100.8 m²)

Panel m²

1.44 m² Per Panel

Pallet Dimensions

2400 mm (W)
1200 mm (L)
930 mm (H)

Pallet Weight

1330 kg

Robust Detail Compliant

E-FC-1 (FFT 5)

E-FC-2 (FFT 5)

E-FS-1 (FFT 5)



Product Applications

Concrete In-situ Floor



1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. Resonate **ResoDeck 23PRO**
3. **ResoEdge L30** flanking strip
4. Levelling compound to achieve SR2 flatness
5. 200mm Reinforced insitu concrete slab
6. MF Ceiling (min 100mm void)
7. 1 x 9.5mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	51 dB
Impact Sound Performance LnT,W	51 dB
Impact Noise Improvement ΔLw	20 dB



Solid Timber Joisted Floor

STJ



1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. Resonate **ResoDeck 23PRO**
3. **ResoEdge L30** flanking strip
4. 18mm (min) timber sub floor
5. 200mm (min) timber floor joists
6. **ResoQuilt** 50mm soundproofing wool
7. 30mm **ResoBar** resilient bars
8. 2 x 15mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	49 dB
Impact Sound Performance LnT,W	57 dB



Profiled Metal Deck Floor

MD



1. Ceramic Tiles / Timber flooring / Carpet / Vinyl
2. Adhesive or decoupling layer
3. Resonate **ResoDeck 23PRO**
4. **ResoEdge L30** flanking strip
5. Levelling compound to achieve SR2 flatness
6. 130mm concrete on profiled metal deck
7. MF Ceiling (min 100mm void)
8. 1 x 9.5mm acoustic plasterboard

Airborne Sound Performance DnT,w + Ctr	51 dB
Impact Sound Performance LnT,W	50 dB



Performance figures shown are for indicative purposes only. For technical advice specific to your project please contact Resonate Systems technical team.

www.resonatesystems.co.uk \ technical@resonatesystems.co.uk