

BOSIG EPDM Membrane / Strip-adhesive and Non-adhesive

BOSIG EPDM membrane creates a weathertight seal when used externally and an airtight seal & vapour barrier when used internally. The BOSIG EPDM membrane can be bonded to a variety of substrates when used with a suitable adhesive sealant or contact adhesive. We supply non-adhesive and adhesive strip Membranes ranging in width (200 - 300mm) and thickness (0.6mm).

Our BOSIG EPDM membrane can be used to seal windows and doors to the reveal in order to achieve airtightness & vapour control internally or wind & weather tightness externally. This is achieved with the use of a 20mm split release butyl strip that is applied to the frame and conveniently hidden once clad. The BOSIG EPDM is bonded to the reveal with either a contact adhesive or BOSIG Fasatan and if using a full adhesive BOSIG EPDM, priming may be required.

BOSIG EPDM Membranes are bitumen compatible, made of BOSIG EPDM rubber for facades. These are equipped with one or more custom-made self-adhesive strips made of butyl rubber. These self-adhesive butyl rubber strips simplify processing and save time because adhesive application or waiting for curing is not necessary anymore. The butyl rubber adhesive has the same ductility as the sealing foil and therefore bonds very well to the most different undergrounds and does not bloom.

The approved quality complies with DIN 18 195. They are also bitumen compatible. They have been examined according to DIN EN 13501 - 1 and correspond to the Fire Behaviour Class E normally inflammable.


Application

Surfaces must be stable, dry, free of grease and dust and must not contain adhesive repellent coatings. Porous surfaces may need to be primed using a suitable primer.

BOSIG butyl strip EPDM is recommended for application to windows and doors. The BOSIG EPDM membrane can be bonded to a substrate using a suitable adhesive sealant or contact adhesive - BOSIG Fasatan Sausage 600ml.

If the BOSIG EPDM is to be used as an airtight vapour barrier membrane, the membrane should overlap by 20mm at the seams and be sealed with a suitable adhesive sealant.

The installer must first apply a sample of the BOSIG EPDM and test the adhesion to see if it's appropriate.

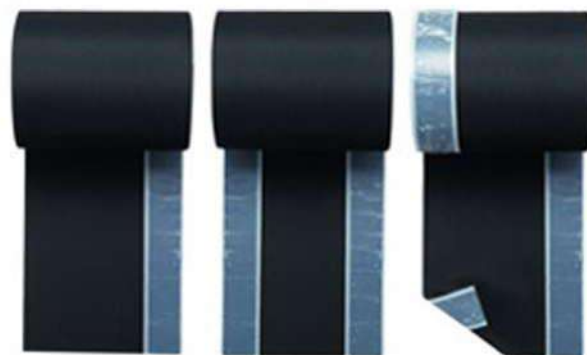

Dimensions

- 200mm - non-adhesive,
- 200mm - butyl strip adhesive
- 300mm - non-adhesive,
- 400mm - butyl strip adhesive.

Technical Data

Reaction to fire	Class E, EN13501-1
Water tightness (2 kPa)	Passed, EN1928
Water vapour permeability	50.000mu, EN1931
Impact resistance	NPD, EN12691
Joint shear resistance	NPD, EN12316-2
Tensile strength (both directions)	≥7MPa, EN12311-2
Elongation (both directions)	≥300%, EN12311-2
Tear resistance	≥10N, EN12310-2
Durability against ageing	Passed, EN1296 / EN1931
Durability against alkali	NPD, Annex C
Processing temperature	from +5°C
Temperature resistance	-40°C to +70°C

Passive House Systems products are used by a very diverse customer base for a wide range of technical and industrial applications. The demands made on our products vary considerably from application to application. We strongly advise users to test the products suitability for their own particular requirement. All data and recommendations contained in this Technical Datasheet are based on our own test results and practical experience and are aimed at helping customers select the appropriate product. This information is provided without liability. We reserve the right to change the technical specification without prior notice. Samples are available free of charge. our sales team are available to help support all technical specifications for our products.